



BMW E46 9inch Android

Are you ready to install our unit? Let's go >>>

5 steps to install

STEP

STEP

Double check if has any missing before installation.

Check1) Do the screen is broken ?2) Do the accessories have missing ?

STEPTest your unit before installing03into your car
(Connect the power cable to your car)


STEP Do the full installation.

STEP **1** Test the head unit functions.

STEP Double check if has any missing before installation.

In this case, the installation can't be plug & play if your car dash radio plug is same as shown on the right picture.

You need to seperately purchase an extension harness for connecting the head unit and the BM54/24 amp in the trunk area.





Please find the ASIN in the listing.

Installation guide

If you are in above three situations, your car should be built-in an amplifier - **BM54/24 tuner** in the trunk area. You need to use the extended harness to connect both of them.




The references of BM54 tuner location





Installation steps

Connect the power plug to the new head unit.
pull the extension harness to the trunk area as shown.

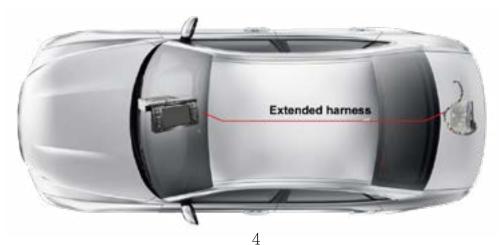

3. Connect the female radio plug of your car with the male plug of extended harness.



From extended harness



4. Connect the female plug of extension harness with the amplifier - BM54/24 tuner.



From extended harness



STEPTest your unit before installing
into your car
(Connect the power cable to your car)

1. Double check the size and shape of the center console panel.



2. Pry the decoration strip from edge with the plastic tool

3. Take out the decoration strip







4. Remove the 2 fixed screws on the factory CD player with a Philips screwdriver.



If the factory plug like below(only 17pin and lack of 4pin). It's not compatible with our Amaseaudio head unit.



5. Take out the factory CD player, the AC controller and the storage box.

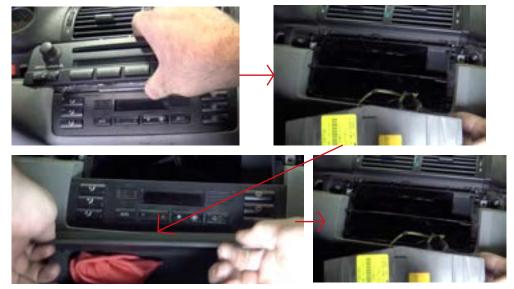

Now you can take out the power cable to connect the head unit and then try to turn it on. If this part is no problem, you can do the remain steps.

STEP Do the full installation.

6. Replace the AC controller to the place of storage box.




7. Remove the 4 fixed screws of the factory mounting bracket with a Philips screwdriver and take out the bracket






8. Connect those wires provided in the package like (1) Power cable with canbus, (2) USB cable, (3) Radio antenna adapter cable, (4) GPS antenna, (5) Wi-fi antenna and (6) External microphone as shown.

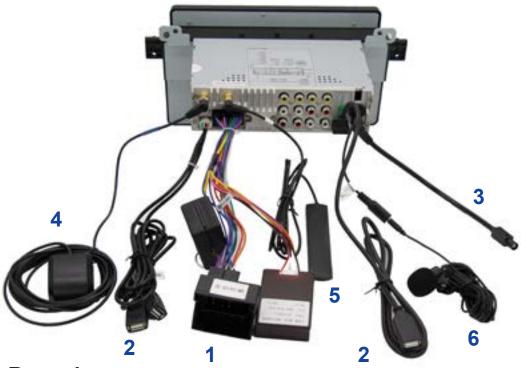

Remark:

The USB cable can support USB flash drive, MP3 player and to charge your mobile phone.

9. Plug the head unit into the center console, then place the GPS antenna and microphone as shown. The wires are hidden in the side of pillar trim and led to the head unit.

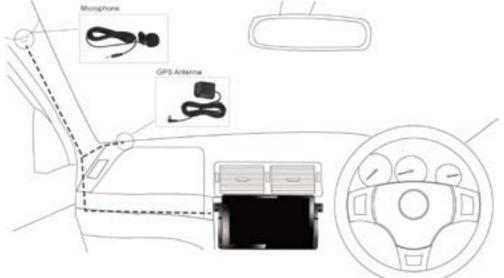

STEP 05 Test the head unit functions. (FM, SD, USB, Bluetooth, reversing, handbrake, headlight, steering wheel control and etc)



10